


TECHNICAL INFORMATION

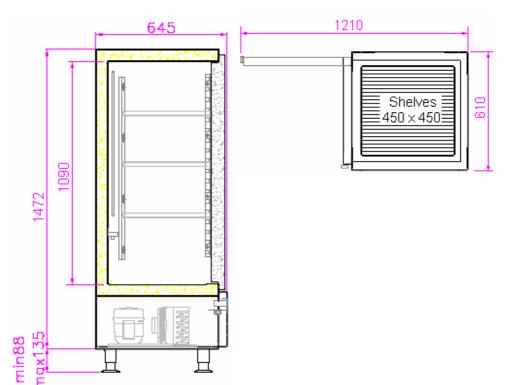

CF-A = incl. compressor

CF-C = excl. compressor

Design outside

St. steel 2333,

Design inside:

St. steel 2333

Insulation:

Freon free polyuretan

Defrost: Automatic

Compressor: Integrated pipe-

system

Door: Magnetic seal and lockable

handles

Shelves: 450 x 450 mm

Crom

Ventilation requirements:

420-620 m³/h

Defrost water heater:

Not standard

	CF-A	CF-C	
	300	300	
L	260	260	
С	-30°-10°	-30°-10°	
С	+32°	-	
W	500	500	
V/hz	230/50-60	230/50-60	
W	315	20	
Kwh/day	4.4	-	
Α	2.5	0.4	
dB (A)	49		
	R-404A	R-404A	
Kg	99	80	
	C W V/hz W Kwh/day A dB (A)	300 L 260 C -30°-10° C +32° W 500 V/hz 230/50-60 W 315 Kwh/day 4.4 A 2.5 dB (A) 49 R-404A	300 300 L 260 260 C -30°-10° -30°-10° C +32° - W 500 500 V/hz 230/50-60 230/50-60 W 315 20 Kwh/day 4.4 - A 2.5 0.4 dB (A) 49 R-404A R-404A

With delivery compressor, the cooling pipes and cables are located on top of cabinet. Thermostat, magnetic valve and expansion valve are mounted.

^{*}Time running 14 hours/24 hours