

KylCity Refrigerator

CK-214




CE

TECHNICAL INFORMATION

CK-A = incl. compressor

CK-C = excl. compressor

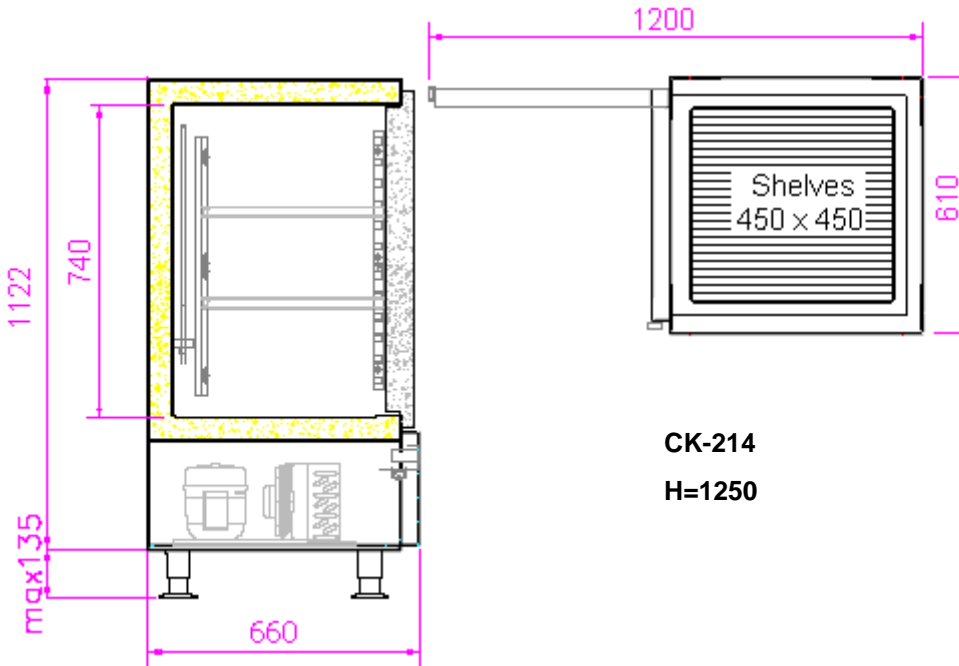

CK-214

H=1250

Design outside
St. steel 2333,

Design inside:
St. steel 2333

Insulation:
Freon free polyuretan

Defrost: Automatic

Compressor: Integrated pipe-system

Door: Magnetic seal and lockable handles

Shelves: 450 x 450 mm
Crom

Ventilation requirements:
420-620 m³/h

Defrost water heater:
Not standard

Model:		CK-A	CK-C
		214	214
Gross volume:	L	170	170
Temp. area	C	-1°+12°	-1°+12°
Outside temp. max	C	+32°	-
Cooling cap $t_2 = -20^\circ\text{C}$	W	150	150
Power	V/hz	230/50-60	230/50-60
Connection effect	W	210	10
Energy use*	Kwh/day	1.9	-
Amp.	A	1.2	0.2
Sound	dB (A)	45	
Cooling system		R-134a	R-134a
Weight	Kg	74	60

With delivery compressor, the cooling pipes and cables are located on top of cabinet. Thermostat, magnetic valve and expansion valve are mounted.

*Time running 14 hours/24 hours

