


KylCity Refrigerator

CK-875 CK-1200



TECHNICAL INFORMATION

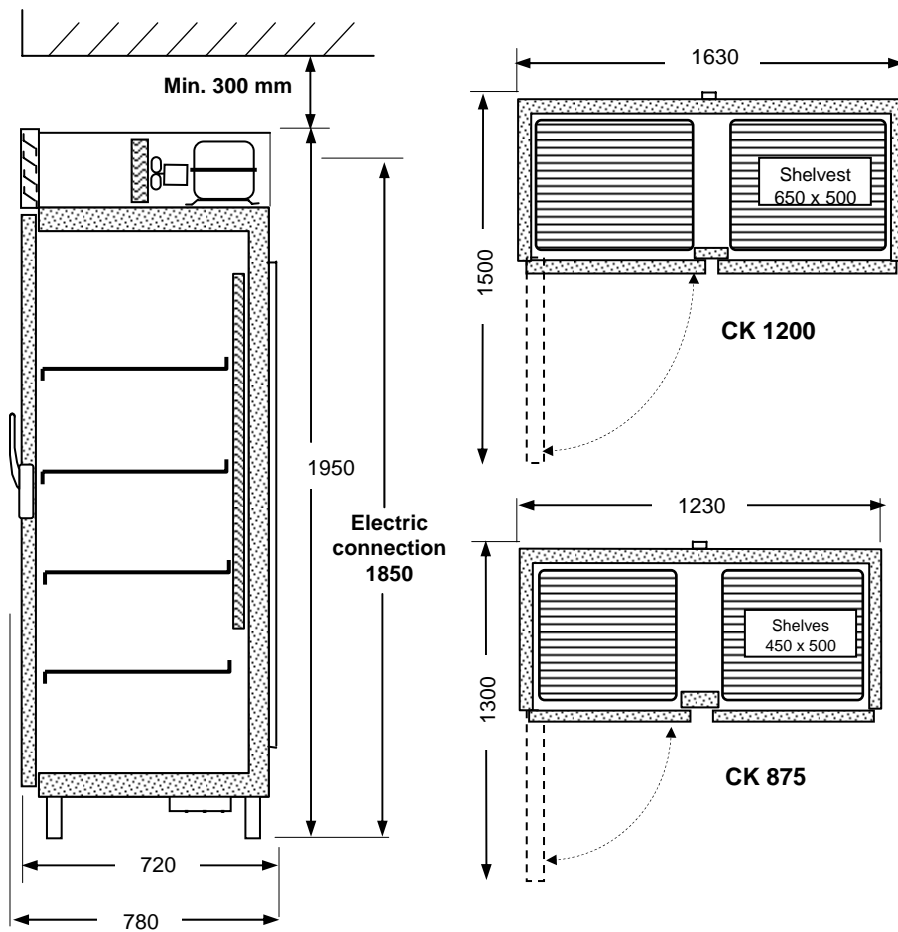

CK-A = incl. compressor

CK-C = excl. compressor

Design outside:

St. steel 2333

Design inside:

St. steel 2333

Insulation:

Freon free polyuretan

Defrost:

Automatic

Compressor:

Integrated pipe-system

Door:

Magnetic seal and lockable handles

Shelves:

Crom

Ventilation requirements:

620-850 m³/h

Model:		CK-A	CK-C	CK-A	CK-C
		875	875	1200	1200
Gross volume	L	820	820	1140	1140
Temp. area	C	-1° +12°	-1° +12°	-1° +12°	-1° +12°
Outside temp. max	C	+32°	-	+32°	-
Cooling cap: t ₂ = - 20°	W	380	380	380	380
Power	V/Hz	230 50/60			
Connection effect	W	405	10	405	10
Energi use*	Kwh/day	5.6	0.14	5.6	0.14
Amp.	A	2.5	0.05	2.5	0.05
Sound	dB(A)	55	-	55	-
Cooling system		R-134a	.	R-134 a	
Weight	kg	215	190	215	190

With delivery compressor, the cooling pipes and cables are lokated on top of cabinet. Thermostat, magnetic valve and expansion valve are mounted.

*Time running 14 hours/24 hours

