

# KylCity Refrigerator

CK-300




CE

# TECHNICAL INFORMATION

CK-A = incl. compressor

CK-C = excl. compressor

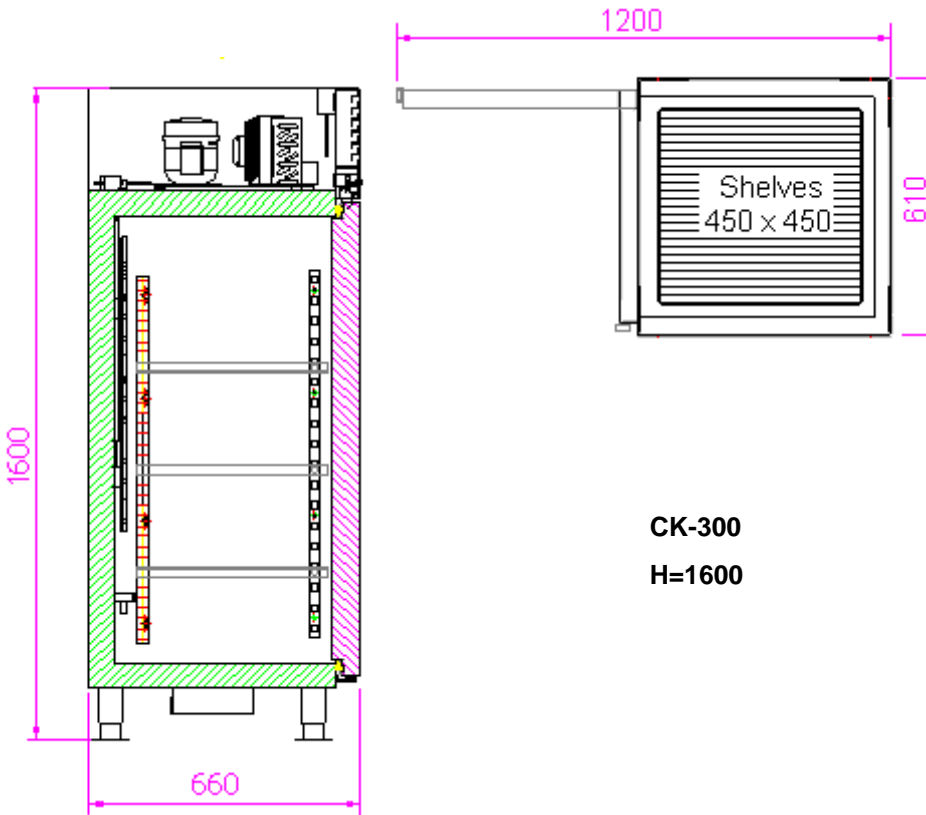

**Design outside**  
St. steel 2333,

**Design inside:**  
St. steel 2333

**Insulation:**  
Freon free polyuretan

**Defrost:** Automatic

**Compressor:** Integrated pipe-system

**Door:** Magnetic seal and lockable handles

**Shelves:** 450 x 450 mm  
Crom

**Ventilation requirements:**  
420-620 m<sup>3</sup>/h

**Defrost water heater:**  
Not standard

Model:		CK-A	CK-C
		300	300
Gross volume:	L	260	260
Temp. area	C	-1°+12°	-1°+12°
Outside temp. max	C	+32°	-
Cooling cap t <sub>2</sub> = - 20° C	W	200	200
Power	V/Hz	230/50-60	230/50-60
Connection effect	W	275	10
Energy use*	Kwh/day	3.8	-
Amp.	A	1.6	0.2
Sound	dB (A)	45	
Cooling system		R-134a	R-134a
Weight	Kg	90	75

With delivery compressor, the cooling pipes and cables are located on top of cabinet. Thermostat, magnetic valve and expansion valve are mounted.

\*Time running 14 hours/24 hours

