

? m` g \_ € d

7? @% \$ \$ # · 7? @%

+2... +10°C



A] ^ ^ " j } b ` | [ h ` S \_ " ^ X a Y X ] i a `



: f c g h `



J U ` ] X Y f ] b [ g \ €



@98 ` 6 Y ` m g b ] b [ `



GH5B85F8IH: xF5B89.




GD97 = 5@IH: xF5B89@5@

- < GhcaaY` a € ` UX ` ] ` F5@- \$ % \* ` Z ` ] f [ `
- < = bhYf ] " f ` Uj ` ` 5 = G = ` S ( ` f c g h Zf ] h h ` g h €
- < + Saa ` ] g c ` Yf ] b [ `
- < ; ` UgX ` f f ` a YX ` i h Vmh VUf ` h ) hb ] b [ ` ] gh
- < G ^ ` ` j gh ] b [ UbXY ` X ` f f `
- < @ ` i X ` c W ` j ] gi Y ` ` h ` UYadYf Uhi f ] Yf g \_ f ]
- < @Ufa ` Z ` f ` ` ddYb ` X ` f f `
- < @Ufa ` Z ` f ` g ai hg ] [ ` \_ cbXYbgcf `
- < @Ufa ` Z ` f ` g \_ UXUX ` hYadYf Uhi f [ ] j Uf Y `
- < 91 hYf b ` ` Uf ai h [ € b [ ÈdchYbh ] U ` Zf ] ` \_ cbhU\_ h `
- < 5i hcaUh ] g \_ ` Uj Zf cghb ] b [ ` c W ` \_ cbXYbgUh ` Uj Xi bghb ] b [
- < : f c g h g \_ mXXggmg hYa
- < ; Y ^ XYf ` h ] ` ` ` \ m ` ` cf # \ cf ] gcbhY ` ` U ` gh " X `
- < & ` VY ` U [ XU ` hf € X \ m ` ` cf `
- < A " ^ ` ] [ \ Yh ` Uhh ` ^ i ghYf U ` \ m ` ` ` ] [ Yh `
- < J U ` ] X Y f ] b [ g \ € ` `
- < > i ghYf VUf U ` VYb `
- < @98 ` 6 Y ` m g b ] b [ `

## Kylskåp med glasdörr

# CKL100

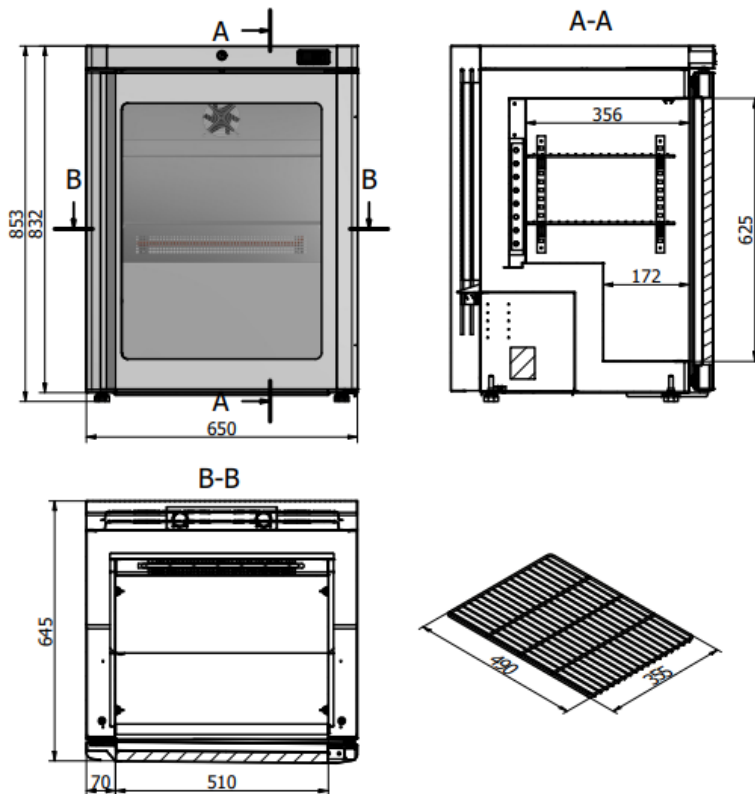

Miljövänligt köldmedium



Frostskyddssystem



Valideringshål



LED belysning

## Specifikationer

	Bredd	Djup	Höjd
Utvändiga mått [mm]:	650	645	853
Invändiga mått[mm]:	510	356/172	625
Typenhet:	Plug-in		
Bruttovolym:	90 [dm <sup>3</sup> ]		
Nettovolym:	85 [dm <sup>3</sup> ]		
Max. last. kapacitet:	60 [kg]		
Max. last. kapacitet/hylla:	25 [kg]		
Antal trådhyllor:	2		
Gejder till hyllor:	4		
Temperaturområde:	+2... +10 [°C]		
Omgivningstemperatur:	+25 [°C] / 60% HR		
Köldmedium:	R290		
Effekt:	220 [W]		
Elanslutning:	230/50 [V/Hz]		
Ampereförbrukning:	1 [A]		
Energiförbrukning:	2.7 [kWh/24h]		
Ljudnivå:	51 [dB]		
Vikt:	90 [kg]		